

# Fiona One




Fiona 1620 x 530  
colour: RAL 8024

Integrated thermostatic valve with immersion tube, angled, right, chrome  
SLIM thermostatic head, chrome  
Integrated pipe-masking set, chrome  
ONE heating element, integrated


# Fiona One



## Connections:






## Electric radiators



## Specification:


Working pressure: 1,0 MPa    Maximum operating temperature: 82°C

A ↑	B ↔	75.65.20°C [W]	55.45.20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]	Product Code <small>Configuration code p. 5</small>
660	430	255	136	300	400	520	70	2,22	4,54	WZFIE066043
660	480	280	149	300	450	520	70	2,40	4,92	WZFIE066048
660	530	304	162	300	500	520	70	2,58	5,30	WZFIE066053
660	580	327	175	300	550	520	70	2,76	5,69	WZFIE066058
660	630	350	188	400	600	520	70	2,94	6,07	WZFIE066063
900	430	342	182	400	400	760	70	3,01	6,08	WZFIE090043
900	480	375	200	400	450	760	70	3,25	6,59	WZFIE090048
900	530	407	217	400	500	760	70	3,49	7,10	WZFIE090053
900	580	438	234	400	550	760	70	3,73	7,61	WZFIE090058
900	630	469	251	400	600	760	70	3,97	8,13	WZFIE090063
1140	430	430	228	400	400	1000	70	3,80	7,62	WZFIE114043
1140	480	471	250	400	450	1000	70	4,10	8,26	WZFIE114048
1140	530	511	272	600	500	1000	70	4,40	8,90	WZFIE114053
1140	580	550	293	600	550	1000	70	4,70	9,54	WZFIE114058
1140	630	589	314	600	600	1000	70	5,00	10,18	WZFIE114063
1380	430	518	275	600	400	1240	70	4,59	9,16	WZFIE138043
1380	480	568	301	600	450	1240	70	4,95	9,93	WZFIE138048
1380	530	616	327	600	500	1240	70	5,31	10,70	WZFIE138053
1380	580	664	352	600	550	1240	70	5,67	11,47	WZFIE138058
1380	630	711	378	800	600	1240	70	6,03	12,23	WZFIE138063
1620	430	608	322	600	400	1480	70	5,38	10,70	WZFIE162043
1620	480	666	353	600	450	1480	70	5,80	11,60	WZFIE162048
1620	530	723	383	800	500	1480	70	6,22	12,49	WZFIE162053
1620	580	779	413	800	550	1480	70	6,64	13,39	WZFIE162058
1620	630	834	442	800	600	1480	70	7,06	14,29	WZFIE162063
1860	430	700	370	800	400	1720	70	6,18	12,24	WZFIE186043
1860	480	767	405	800	450	1720	70	6,65	13,27	WZFIE186048
1860	530	832	440	800	500	1720	70	7,13	14,29	WZFIE186053
1860	580	897	474	1000	550	1720	70	7,61	15,32	WZFIE186058
1860	630	960	507	1000	600	1720	70	8,09	16,34	WZFIE186063




# Fiona One



Available sizes:

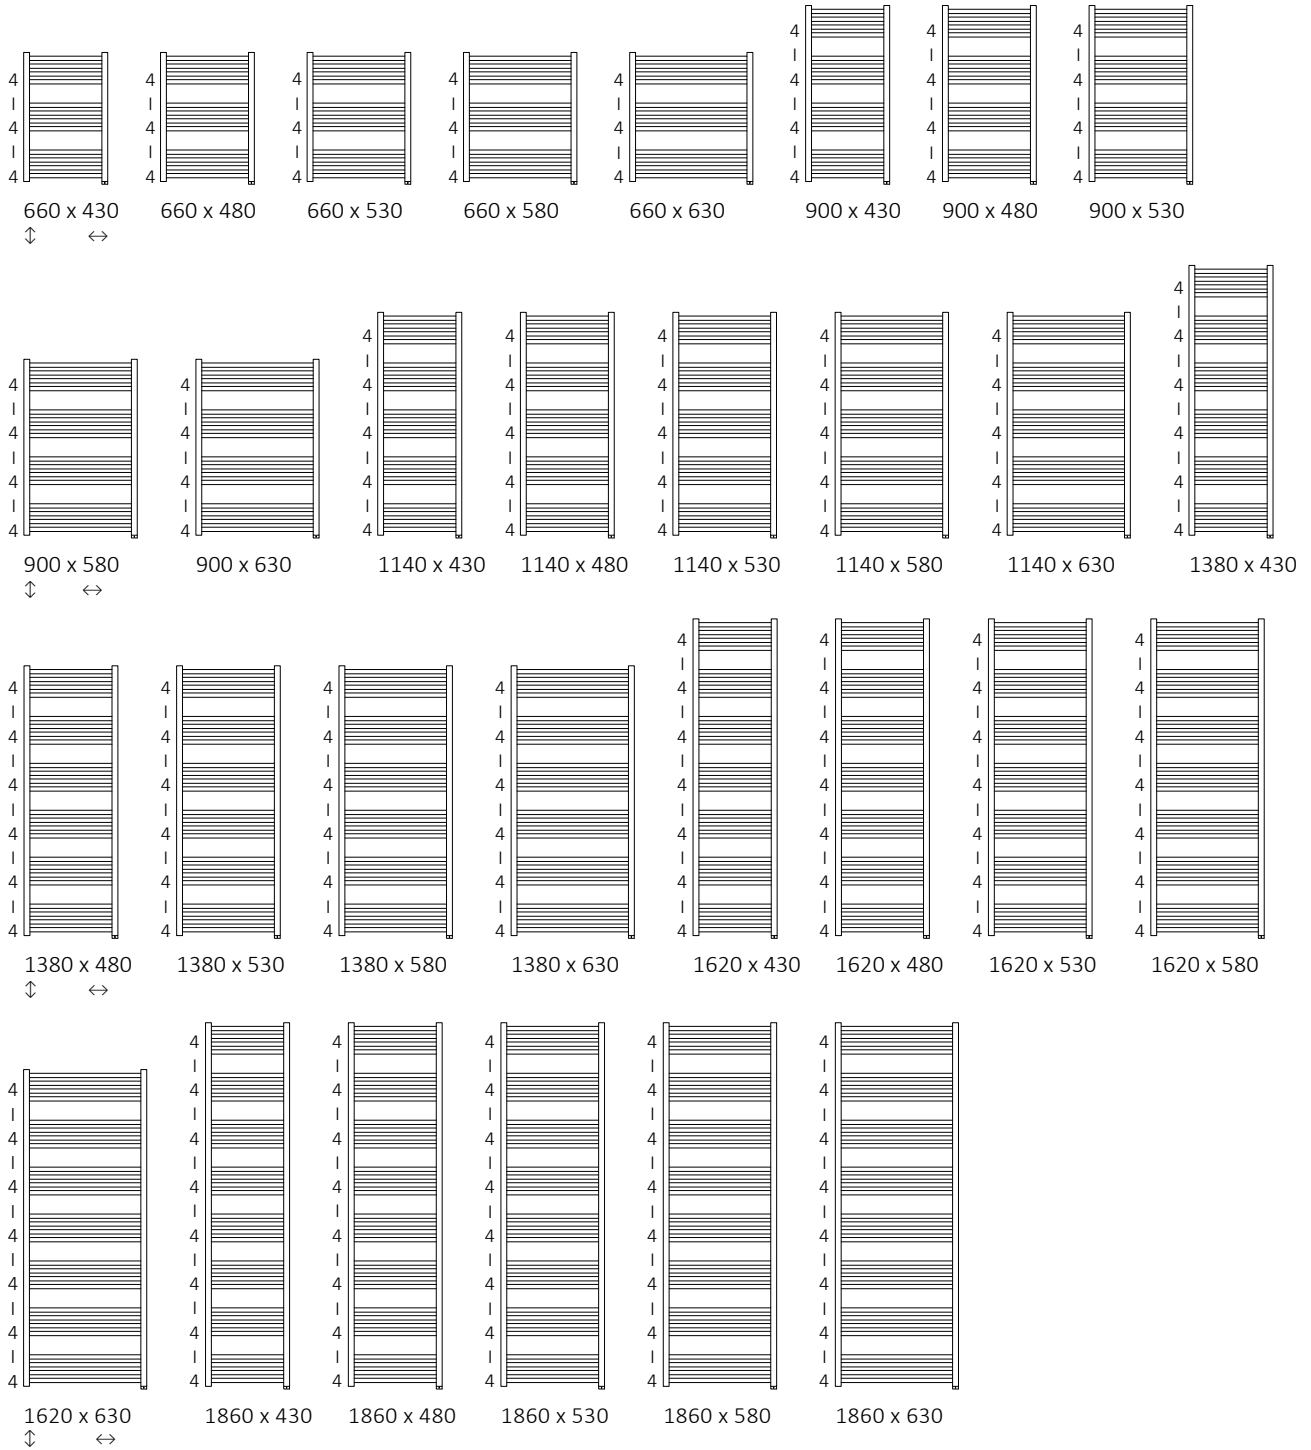



# Fiona One

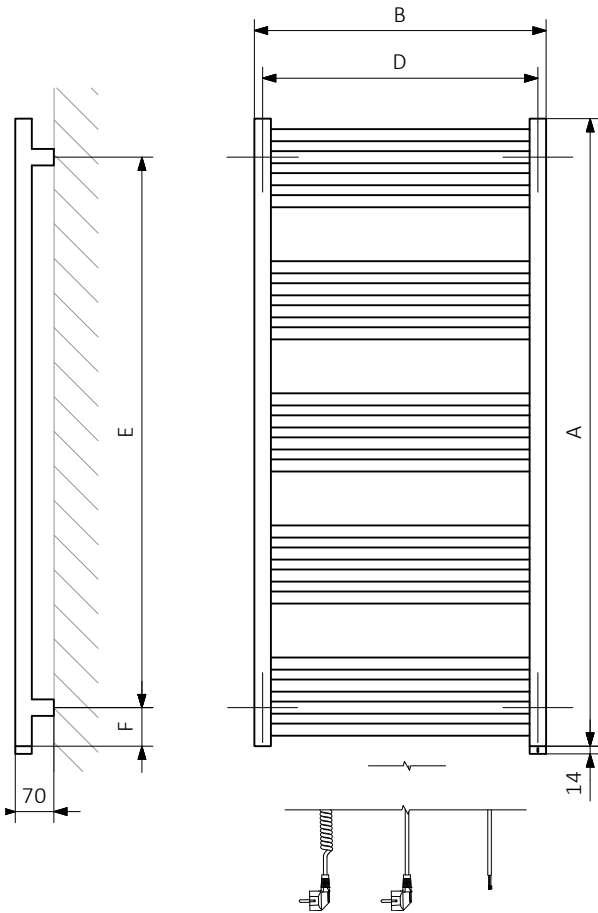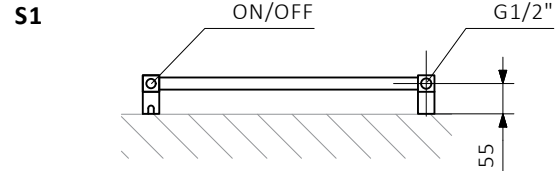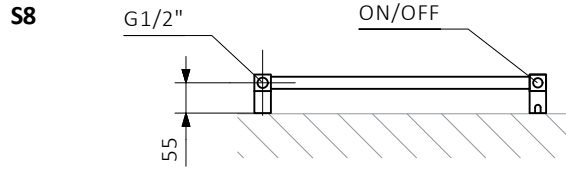

A – height B – width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres  
E – Vertical distance between mounting brackets F – Distance between mounting bracket and the bottom of the radiator

**Collector:**

**Profile:**





Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

## The Construction of the product and configuration code for a radiator with the built-in heating element ONE

WWBNN076050

K916E1W

PRODUCT CODE  
(located in the table for the product)

CONFIGURATION CODE  
(supplemented by hand)

### Configuration

K 916 E1 P

Package code   Colour code   Connection code   Type of heating element cable code  
*K – carton box*

### Zinc powder primer

**C** – Code of zinc powder primer is an extra processes

WLAL054030 K916SX **C** — *Extra processes or additions code*

# Fiona One



## Legend



Available in chrome finish.



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator.  
The icon shows the flow and return connections for the radiator as well as the thermostat valve and heating element position if applicable.



Optional connections available for this radiator.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.