


PLC H



Colour included
in the price

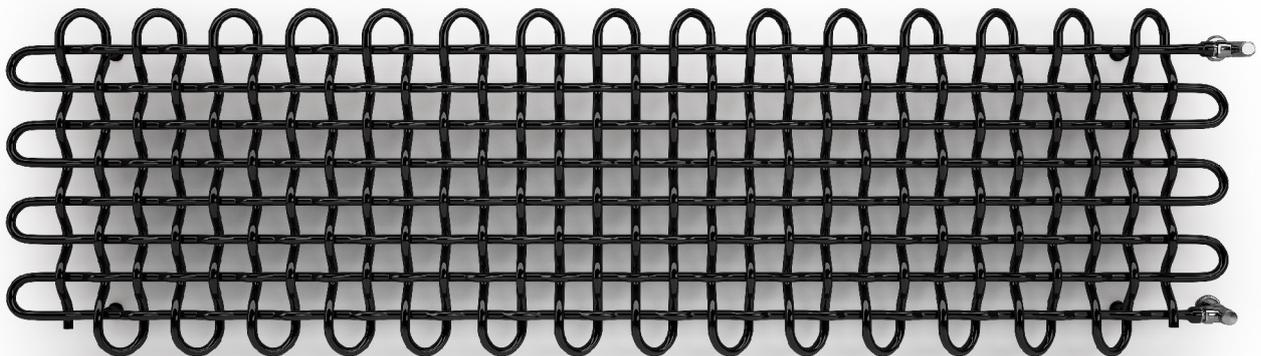

PLC H 463 x 1600
colour: RAL 9005


Angled lockshield valve, chrome
Angled regulating valve, chrome
Pipe-masking set, chrome



Colour included
in the price

design: Jacek Ryń

Connections:




We recommend:

Pipe-masking set,
chrome


Zinc primer



Available sizes:



263 x 1600
↓ ↔

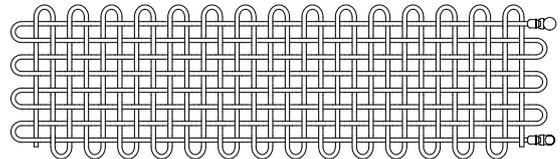



463 x 1600

Specifications:

Working pressure: 1,0 MPa Maximum operating temperature: 95°C

A ↓	B ↔	C3 [mm]	75/65/20°C [W]	55/45/20°C [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]	Product Code <small>Configuration codes: 4</small>
263	1600	150	341	174	1350	150	56,5	1,27	7,07	WGPLH026160
463	1600	350	622	317	1350	350	56,5	2,40	13,15	WGPLH046160

Included components: Radiator (water version) sold together with angled thermostatic valve, angled lockshield valve, SLIM thermostatic head and adapters for installation (Alupex Ø 16x2 and copper Ø 15). All valve components are finished in chrome.

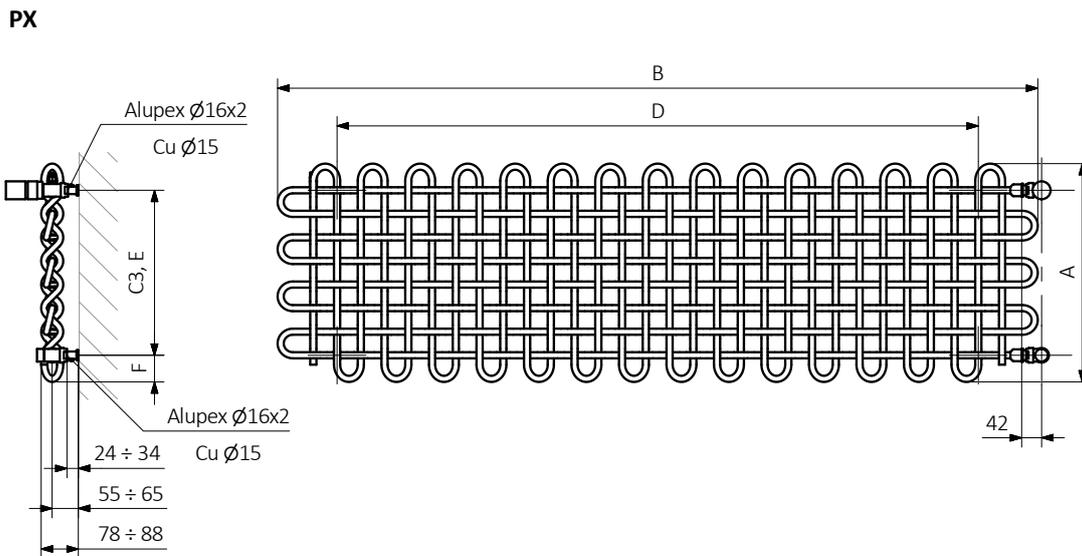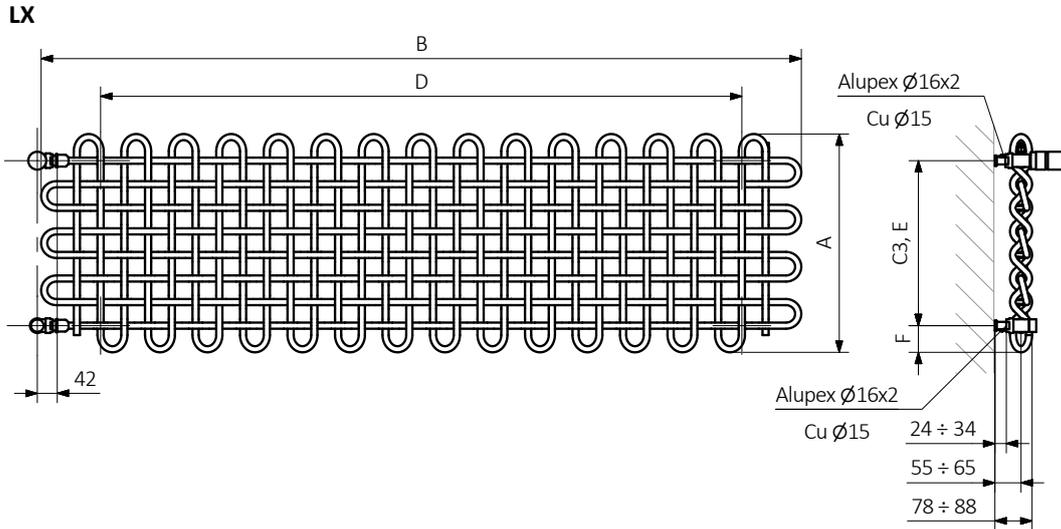

A — Height B — Width C1-C5 — Distance between pipe centres D — Horizontal distance between mounting bracket centres
E — Vertical distance between mounting brackets F — Distance between a mounting bracket and the bottom of the radiator

Profile:





Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

The construction of a water product and configuration code:

WGALE054030

PRODUCT CODE
(located in the table for the product)

K916SX

CONFIGURATION CODE
(supplemented by hand)

Configuration

K 916 SX

Package code Colour code Connection code
K – carton box

Zinc powder primer

C – Code of zinc powder primer is an extra processes

WLALE054030 K916SX **C** — *Extra processes or additions code*



Legend



Available in chrome finish.



Radiator available in a “water” version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a ‘heating medium’ and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator.
The icon shows the flow and return connections for the radiator as well as the thermo-
static valve and heating element position if applicable.



Optional connections available for this radiator.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.