

# PLC V



Colour included  
in the price



**TERMA**

SINCE 1990



PLC V 1800 x 463  
*colour: sweet sugar*

Integrated thermostatic valve, angled, left, chrome  
SLIM thermostatic head, chrome  
Integrated pipe-masking set, chrome

## Connections:

B ↔ 263



B ↔ 463÷663:



## We recommend:


Integrated pipe-masking set




## Available sizes:



1580 x 263  
↑ ↓ ↔

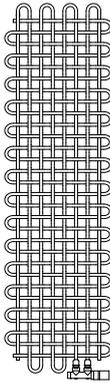


1600 x 463

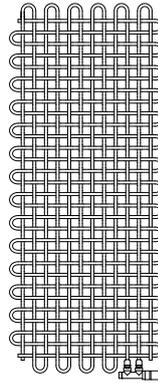


1600 x 663



1780 x 263

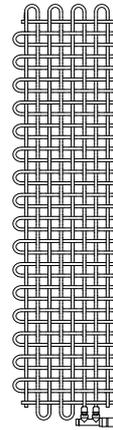

1800 x 463

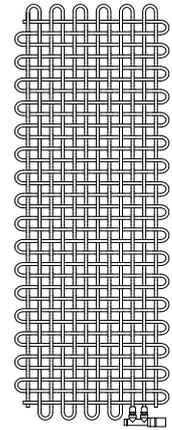

1800 x 663

## Specifications:


Working pressure: 1,0 MPa    Maximum operating temperature: 95°C

A ↑ ↓	B ↔	C1 [mm]	75,65,20°C [W]	55,45,20°C [W]	D [mm]	E [mm]	F [mm]	U [dm³]	W [kg]	Product Code <small>Configuration codes: 4</small>
1580	263	50	331	169	150	1350	105	1,26	7,02	WGPLV158026
1600	463	50	613	312	350	1350	125	2,39	13,09	WGPLV160046
1600	663	50	894	456	550	1350	125	3,51	19,17	WGPLV160066
1780	263	50	373	190	150	1550	105	1,43	7,93	WGPLV178026
1800	463	50	690	352	350	1550	125	2,70	14,78	WGPLV180046
1800	663	50	1007	514	550	1550	125	3,96	21,63	WGPLV180066

**Included components:** The radiator is sold with an integrated, angled thermostatic valve, SLIM thermostatic head and adapters for installation (Alupex Ø 16x2 and copper Ø 15). All valve components are finished in chrome.


# PLC V

  Colour included in the price

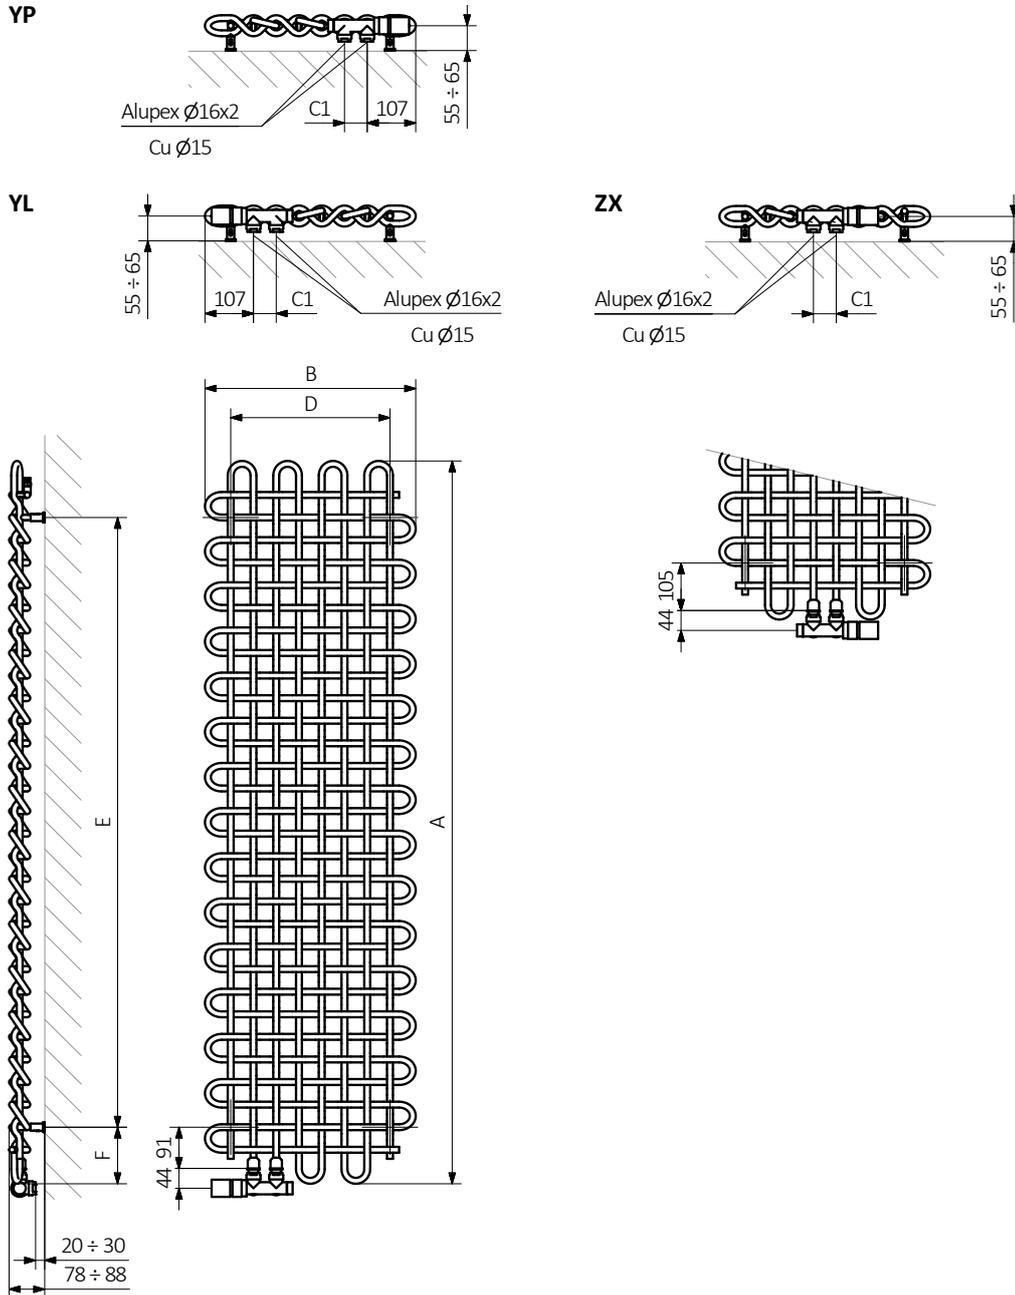

A — Height B — Width C1-C5 — Distance between pipe centres D — Horizontal distance between mounting bracket centres  
E — Vertical distance between mounting brackets F — Distance between a mounting bracket and the bottom of the radiator

**Profile:**





Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

The construction of a water radiator product and configuration code:

WGALE054030

PRODUCT CODE  
(located in the table for the product)

K916SX

CONFIGURATION CODE  
(supplemented by hand)

Configuration

K 916 SX

Package code   Colour code   Connection code  
*K – carton box*

Zinc powder primer

**C** – Code of zinc powder primer is an extra processes

WLALE054030 K916SX **C** — *Extra processes or additions code*



## Legend



Available in chrome finish.



Radiator available in a “water” version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a ‘heating medium’ and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator.

The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Optional connections available for this radiator.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.