


Salisbury



colour included
in the price

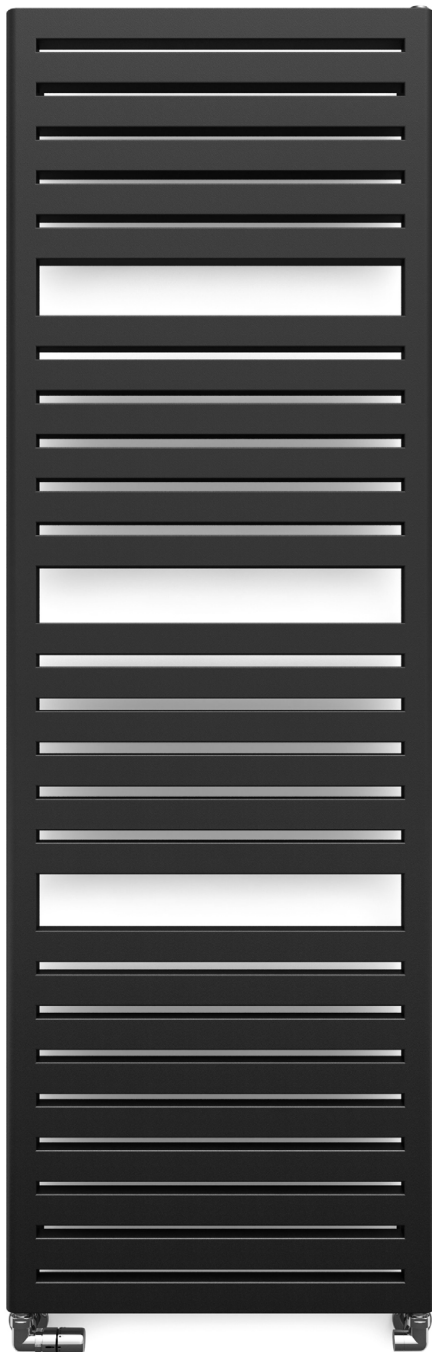

Salisbury 1635↓ × 540↔ SX
colour: Heban

3-axis thermostatic valve set, left, chrome
Pipe-masking set, chrome



TERMA
SINCE 1930






colour included
in the price

Design: Terma

Standard connection:



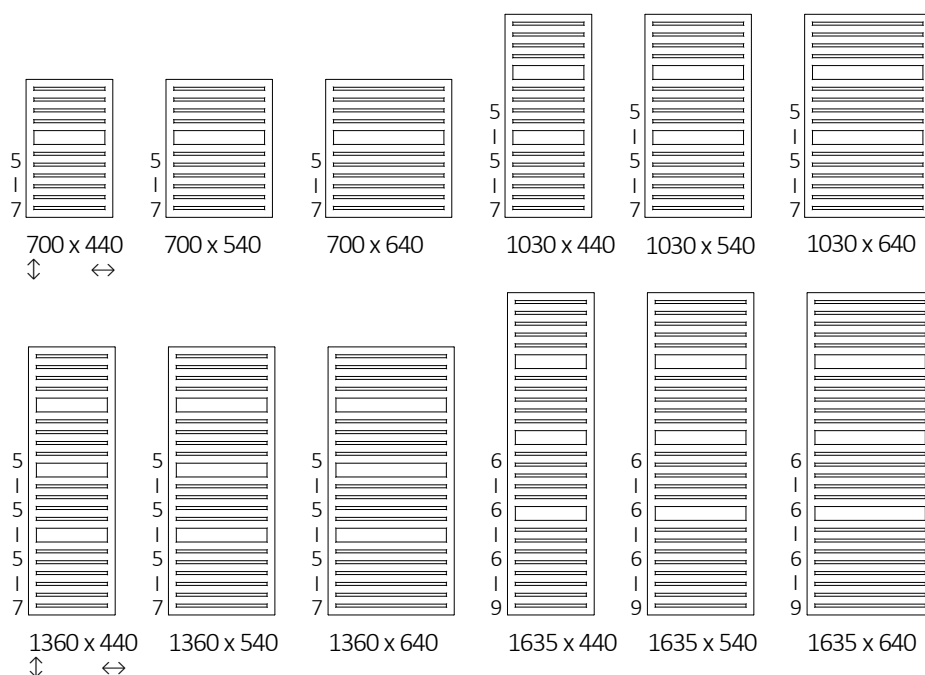


Available sizes:



Specification:

Working pressure: 800 kPa Maximum operating temperature: 95°C


A ↓ [mm]	B ↔ [mm]	C2 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]	Product code <small>Configuration code p. 5</small>
700	440	400	318	169	300	390	550	75	5,60	9,05	WGQ12070044
700	540	500	447	238	400	490	550	75	6,79	11,08	WGQ12070054
700	640	600	576	307	600	590	550	75	7,99	13,04	WGQ12070064
1030	440	400	435	232	400	390	880	75	8,00	13,12	WGQ12103044
1030	540	500	529	282	600	490	880	75	9,69	15,87	WGQ12103054
1030	640	600	621	331	600	590	880	75	11,39	18,62	WGQ12103064
1360	440	400	552	294	600	390	1210	75	10,40	17,11	WGQ12136044
1360	540	500	674	359	800	490	1210	75	12,59	20,65	WGQ12136054
1360	640	600	795	423	800	590	1210	75	14,79	24,20	WGQ12136064
1635	440	400	650	346	600	390	1485	75	12,70	20,94	WGQ12163044
1635	540	500	794	423	800	490	1485	75	15,39	25,28	WGQ12163054
1635	640	600	940	501	1000	590	1485	75	18,08	29,61	WGQ12163064




colour included
in the price

Technical drawing:



SX

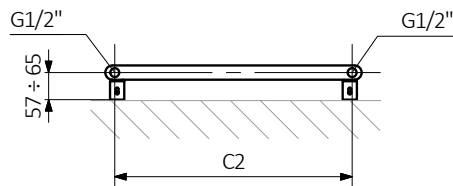


ZX

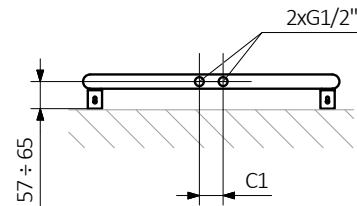



72 ÷ 80

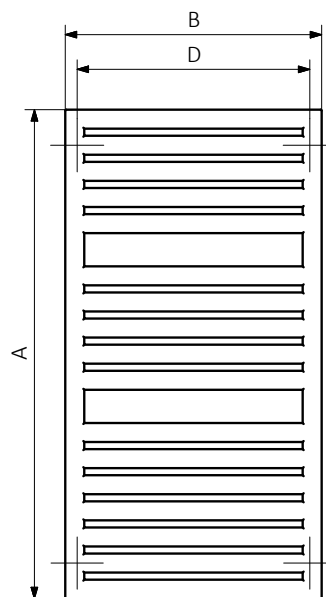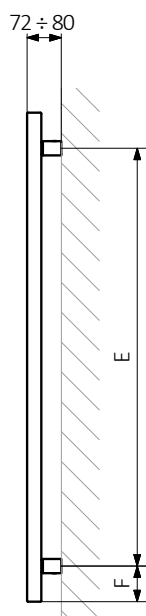

Z1

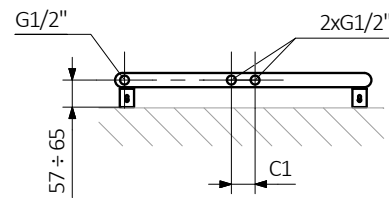



Z8

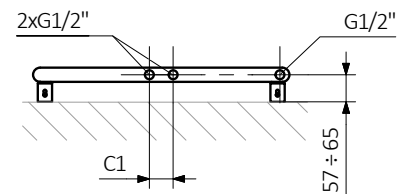

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres
E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:

Pipe:





In the table with technical data, the last column lists product codes. When placing an order, please remember to quote the product code followed by the configuration code as shown in the diagram below:

The construction of a water and dual fuel radiator product and configuration code:

WGQ12070044

K916SX

PRODUCT CODE

(located in the table for the product)

CONFIGURATION CODE

(supplemented by hand)

Example Configuration

K 916 SX

Package code

K - carton box


Colour code

Connection code

Epoxy primer

E - Code of epoxy primer is an extra processes.

WGQ12070044 K916SX **E** — *Extraprocessesoradditionscode*



Legend



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator. The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.



Available in chrome finish.



No additional payment for a color.