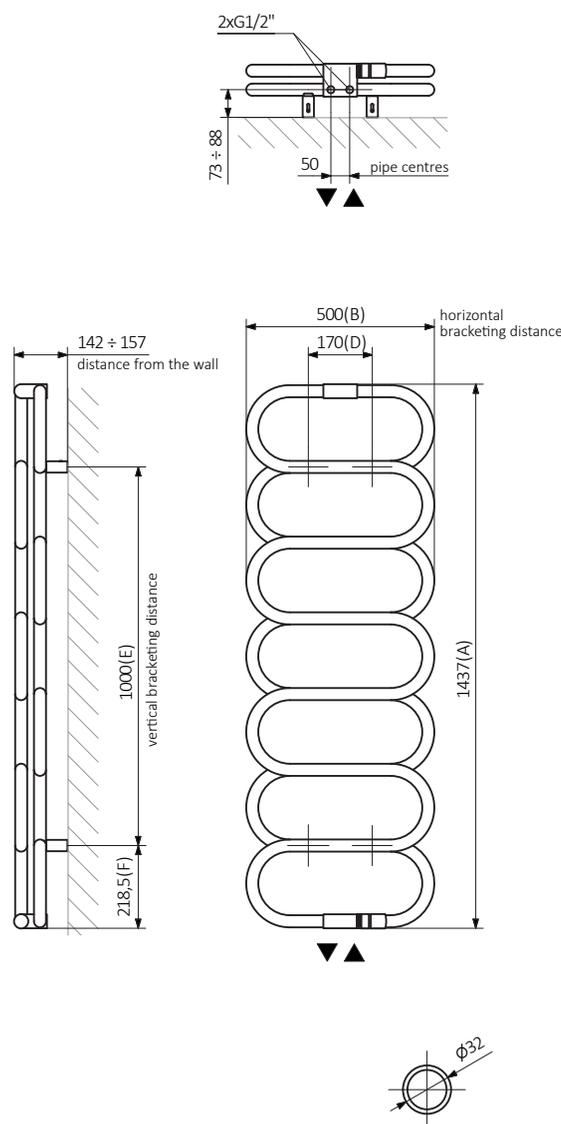




Installation guide Ouse 1437 x 500 mm

Please read the instructions in full before starting to fit your radiator.

- Please check that all parts listed are present before starting installation.
- Valves are not provided, please make sure that you have them before you start. This product requires standard 1/2" radiator valves.
- Before drilling holes for the brackets please check that there are no hidden wires or pipes.
- The plugs supplied are for hard walls masonry only. Please make sure you are using the correct plug for your wall.
- Terma radiators are designed for closed heating systems.
- The radiator should be fitted at least 100 mm from the floor to maximise heat efficiency.
- Noting the distances between bracket centres, mark out the position of the brackets on the wall.
- Drill holes to approximately 80 mm depth using a 10 mm drill bit and insert rawl plugs (1). Using connecting screw with a washer (2) attach mounting bracket-1 (3).
- Using bracket to collector fixing screw (5) attach mounting bracket-2 (6) to radiator.
- Guide all mounting brackets-2 (6) into mounting brackets-1 (3) and fix with connecting screws (4)
- Connect the water flow using the appropriate 1/2" BSP valves, tightly wrapping PTFE tape around the thread of the valve. Follow the valve manufacturer's guidelines for correct installation.
- Install the thermostatic head supplied with the radiator. Follow the manufacturer's guidelines for correct installation.
- Fill the radiator and purge any trapped air via the bleed valve at the top of the radiator.
- Wipe your radiator down using a clean damp cloth. Never use scourers or abrasives.



Fixing kit content

| | |
|---------------------------------------|---|
| rawl plug (1) |  |
| wall fixing screw + washer (2) |  |
| mounting bracket-1 (3) |  |
| bracket connecting screw (4) |  |
| bracket to collector fixing screw (5) |  |
| mounting bracket-2 (6) |  |
| air vent * |  |
| SLIM thermostatic head * |  |
| allen key |  |

* Refers to water and dual fuel version

For all installation and warranty enquiries please contact Crimson Bear Customer Support on 01535 636256

Mounting bracket TERMA MK; Ø32; 60÷75 mm; 4x

